

Safety Instructions

1, 2, 3, 4, 5, 6, 10, 12, 14, 15, 16, 19,
20, 21, 22, 33, 34



Info

www.paulmann.com

Paulmann Licht GmbH
Quezinger Feld 2
31832 Springe
Germany

www.paulmann.com

Art.-Nr.: 988.96
988.97

(+MA 326) PJI 08/19



988.96



1x



1x



1x

988.97



3x






3x





3x



A

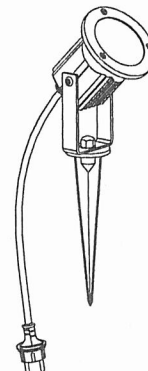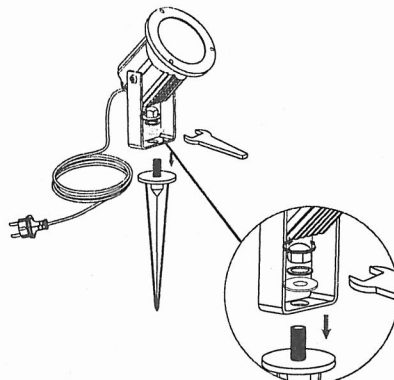



B

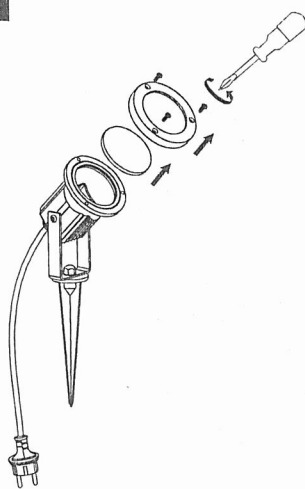


Safety
Instructions
Nr. 3, 4, 5




off

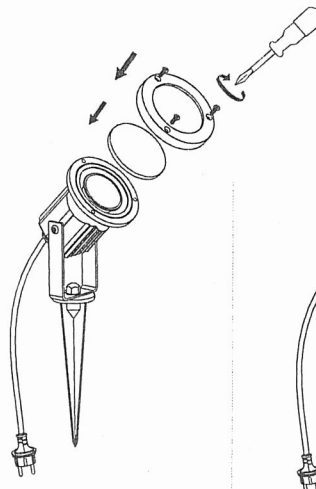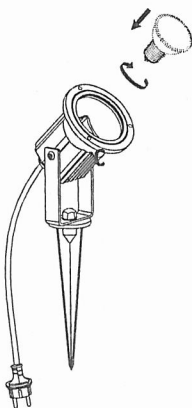

i IP65

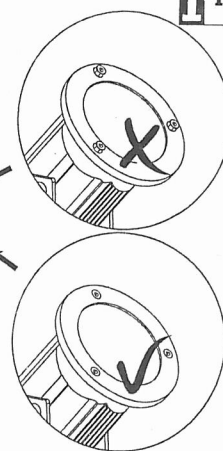


C

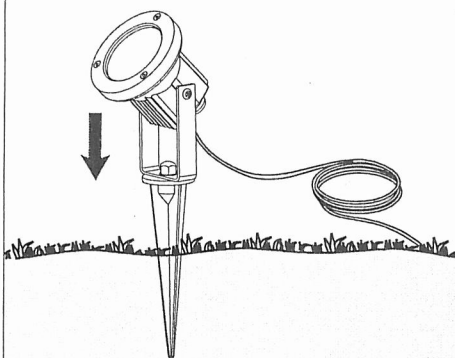

i IP44

i IP65

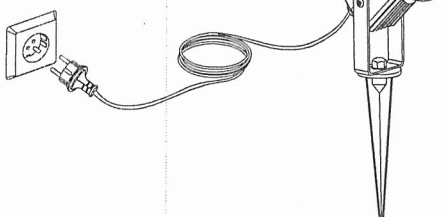

! The min bending diameter of rubber cable is 60 mm

